



PCT/IB 04 / 02592  
( 22.07.04 )

IB04/02592



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 22 JUL 2004	
WIPO	PCT


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

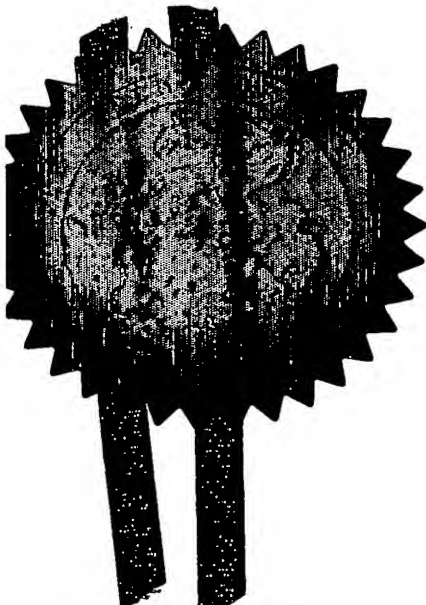


Signed

*H. Behen*

Dated 20 April 2004

The  
Patent  
Office

1/77

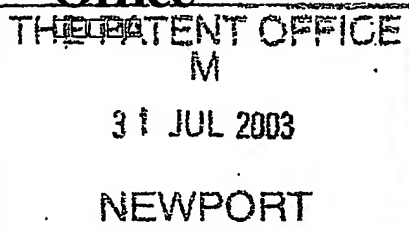

31 JUL 03 0826731-2 002879  
P01/7700 0.00-0317909.0

**Request for grant of a patent**  
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

**The Patent Office**  
Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference PHGB 030127GBP

---

2. Patent application number 0317909.0  
(The Patent Office will fill in this part) 31 JUL 2003

---

3. Full name, address and postcode of the or of each applicant (underline all surnames) KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS  
07419294001  
  
Patents ADP Number (if you know it)  
  
If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS

---

4. Title of the invention SWITCHABLE 2D/3D DISPLAY

---

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
  
Patents ADP number (if you know it) Philips Intellectual Property and Standards  
Cross Oak Lane  
Redhill  
Surrey  
RH1 5HA  
08359655001

---

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

	Country	Priority Application number (if you know it)	Date of filing (day/month/year)

---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

	Number of earlier application	Date of filing (day/month/year)

---

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

## Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

### Continuation sheets of this form

Description	8	/
Claims(s)	3	/
Abstract	1	/
Drawings	6	pages

If you are also filing any of the following, state how many against each item:

### Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)


Request for substantive examination  
(*Patents Form 10/77*)

Any other documents

(Please specify)

I/We request the grant of a patent on the basis of this application.

Signature



Date 30/7/2003

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815438

(A. G. WHITE)

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- 1) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- 2) Write your answers in capital letters using black ink or you may type them.
- 3) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- 4) If you have answered "Yes" Patents Form 7/77 will need to be filed.
- 5) Once you have filled in the form you must remember to sign and date it.
- 6) For details of the fee and ways to pay please contact the Patent Office

## DESCRIPTION

### SWITCHABLE 2D/3D DISPLAY

The present invention relates to a display device.

Liquid crystal display devices, in which a backlight is modulated on a pixel-by-pixel basis using a liquid crystal matrix, are well-known. Such devices generally produce a two-dimensional (2D) image. Three dimensional (3D) images can be produced but additional components are required. For example, an array of semi-cylindrical lenses can be placed in front of the liquid crystal device. Alternatively, in a parallal barrier technique, a barrier layer comprising an opaque sheet with a pattern of transparent lines is placed between the backlight and the liquid crystal matrix. A further technique, disclosed in US-A-4717949, uses thin parallel light sources behind a liquid crystal matrix.

These known techniques suffer from the problem that a display must be constructed as either a 2D display or a 3D display.

It is an object of the present invention to provide a display device that can be used to provide both 2D and 3D images.

According to the present invention, there is provided a display device comprising a light source and an array of light intensity modulators for modulating light from the light source, wherein the light source is configured for operation as a single broad light source or a plurality of narrow light sources, spaced in a spacing direction, and the light source and the array are arranged such that each modulator is significantly illuminated by only one of said narrow sources and a string of modulators, parallel to said spacing direction, is illuminated by each narrow light source.

Thus, a 2D image can be provided by energising the whole light source and a 3D image can be provided by selectively energising just the narrow light sources.

The aforementioned arrangement of modulators and light sources need  
5 not occupy the whole image-forming extent of the display device.

The separation of the light sources in US-A-4717949 makes the device disclosed therein unsuitable for operating as a broad light source.

The narrow light sources could be point sources. However, it is preferred that the narrow light sources be elongate and aligned substantially  
10 perpendicular to the spacing direction as this simplifies manufacture.

Preferably, the light source has a light emitting face which is substantially coextensive with and plane parallel to the array, which may be an array of pixels of a liquid crystal display.

Preferably, the light source comprises a light emitting diode structure,  
15 e.g. an organic light emitting diode structure. More preferably, the light source comprises alternating thick and thin parallel control electrodes which are themselves independently controllable. Alternatively, the light source may comprise thin, side-by-side, parallel, independently controllable control electrodes. This enables the portion of the organic light emitting diode  
20 structure used in 3D mode to be changed and thereby extend the useful life of the display as a whole.

By arranging the control electrodes in a two-dimensional grid, it is possible to mix 2D and 3D images in a substantially arbitrary manner.

Where the pixels are arranged in a rectangular grid, unwanted artefacts,  
25 such as banding, can be reduced or eliminated by the control electrodes being skewed by an angle ( $\theta$ ), preferably but not essentially  $10^\circ$  or less, relative to the pixel columns.

A colour image can be produced by a device in which the light source comprises a two-dimensional array of regions. These regions may emit different coloured light and, are preferably arranged in a repeating pattern, for the production of colour images. Also, the intensity of the light emitted from these regions may be varied independently in dependence on the local intensity of the image being displayed. Thus, parts of the image that are dim are backlit with low intensity light and parts of the image that are bright are backlit with high intensity light.

Optimal 3D performance is obtained when the length of each of said strings is substantially the same as the spacing between its illuminating narrow source and a neighbouring narrow source thereof.

A display according to the present invention may be employed in electronic apparatuses, including personal digital organisers, computers, mobile phones and the like.

15

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows a personal digital assistant including a display according to the present invention;

Figure 2 is a schematic cross-sectional view, along the line AA, of a first embodiment of the display panel for a personal digital assistant as shown in Figure 1;

Figure 3 illustrates the operation of the display panel of Figure 2 in 2D mode;

Figure 4 illustrates the operation of the display panel of Figure 2 in 3D mode;

Figure 5 is a schematic cross-sectional view, along the line AA, of a second embodiment of a display panel for a personal digital assistant as shown in Figure 1;

Figure 6 is a partial schematic perspective view of a third embodiment of a display panel for a personal digital assistant as shown in Figure 1;

Figure 7 shows the personal digital organiser of Figure 1 with the display panel of Figure 6;

Figure 8 is a partial schematic perspective view of a fourth embodiment of a display panel for a personal digital assistant as shown in Figure 1;

Figure 9 illustrates the operation of a fifth embodiment of a display panel for a personal digital organiser on a first occasion; and

Figure 10 illustrates the operation of the display panel of Figure 9 on a second later occasion.

Referring to Figure 1, a personal digital assistant (PDA) 1 comprises a flat cuboid body 2. A rectangular display panel 3 and keys 4 are mounted in one of the major faces 2a of the body 2. The keys 4 enable a user to interact with programs running on the PDA 1. The display panel 3 display images generated by programs running on the PDA 1.

Referring to Figure 2, the display panel 3 comprises a frame 4 which contains a liquid crystal display (LCD) 5 overlying a planar organic light emitting diode (OLED) backlight 6. The display panel 3 can be operated in 2D and 3D modes.

The LCD 5 is conventional and comprises upper and lower electrode-bearing glass sheets 7, 8 separated by a liquid crystal material 9. The pixel pitch of the LCD 5 in this example is 100 $\mu$ m. The OLED backlight 6 is also generally conventional and comprises at least a substrate 10, a lower

electrode layer 11, printed polymer layers 12 and an upper electrode layer 13. The printed polymer layers 12 produce white light. The OLED backlight 6 is unconventional in that the lower electrode layer 10 is divided into thick 11a and thin 11b electrodes (shown exaggerated in Figure 2 for clarity). The width of each thick electrode 11a is the width of four pixels of the LCD 5 and the width of each thin electrode 11b is the width of one pixel of the LCD 5, allowing for the necessary separation of the electrodes 11a, 11b. A two-pixel wide electrode 11c is formed at the left hand side of the OLED backlight 6. This electrode 11c is a truncated wide electrode and hereinafter is included in the scope of the term "wide electrodes".

Referring to Figure 3, when the display panel 3 is being operated in 2D mode, all of the electrodes 11a, 11b, 11c of the OLED backlight 6 are energised and the overlying regions 12a, 12b, 12c of the polymer layers 12 emit light. The dimensions of the present example are such that each pixel of the LCD 5 is illuminated by light from an approximately 5-pixel wide strip of the polymer layers 12. Correspondingly, any one-pixel wide stripe of the polymer layers 12, parallel to the electrodes 11a, 11b, 11c, will contribute to the illumination of a five-pixel wide portion of the LCD 5.

Referring to Figure 4, when the display panel 3 is being operated in 3D mode, only the thin electrodes 11b are energised and only the polymer layer strips 12b overlying these emit light. Consequently, pixel lines 1 to 5 of the LCD 5 are illuminated by the strip of the polymer layers 12 overlying the first thin stripe 11b<sub>1</sub>, pixel lines 5 to 10 are illuminated by the strip of the polymer layers 12 overlying the second thin stripe 11b<sub>2</sub> and so on.

A first image is formed by pixel lines 1, 6, 11, 16, 21, 26. A second image is formed by pixel lines 2, 7, 12, 17, 22, 27. A third image is formed by pixel lines 3, 8, 13, 18, 23, 28. A fourth image is formed by pixel lines 4, 9, 14, 19, 24, 29. A fifth image is formed by pixel lines 5, 10, 15, 20, 25, 30. The five images are of the same scene from slightly different perspectives, i.e. different viewing angles. Consequently, the viewer perceives a 3D image.



The embodiment of the display panel 3 shown in Figures 3 and 4 produces monochrome images. A second embodiment of the display panel 3 is capable of producing colour images.

Referring to Figure 5, the second embodiment of the display panel 3 is substantially the same as the first embodiment, described above. However, the polymer layers 12 are divided into stripes which emit either red 12R, green 12G or blue light 12B. With the exception of the leftmost stripe, each polymer layer stripe 12R, 12G, 12B overlays a thick electrode 11a and a neighbouring thin electrode 11b. The energising of the electrodes 11a, 11b is controlled by a control circuit 16 in dependence on data representing the image to be displayed.

In the foregoing embodiments, the lower electrodes 11a, 11b, 11c of the OLED backlight 6 extend unbroken along the full height of the display panel 3. In a third embodiment of the display panel 3 the lower electrodes 11a, 11b, 11c are divided transversely.

Referring to Figure 6, the third embodiment of the display panel 3 is substantially the same as the first embodiment described above. However, each of the lower electrodes 11a, 11b is divided transversely into a large number of sections 11a', 11a'', 11b', 11b'' (only two shown for clarity). Each electrode section 11a', 11a'', 11b', 11b'' can be energised independently by the control circuit 16. Consequently, as shown in Figure 7, 2D regions 20, in which both the thick and thin electrodes 11a', 11a'', 11b', 11b'' are energised, can be mixed with 3D regions 21, in which only the thin electrodes 11b', 11b'' are energised.

With the light source divided into a two-dimensional array of individually controllable regions, it is possible for the control circuit 16 control the brightness of these regions by varying the voltages applied across them to improve the dynamic range of the display. Thus, in dim areas of an image the intensity of the backlight controlled to be low and in bright areas of an image

the intensity of the backlight controlled to be high. This advantage is not only available with colour displays and can be achieved in monochrome displays by dividing the backlight into a two-dimensional array of regions that all emit the same colour light.

- 5 All of the foregoing embodiments sacrifice resolution on one axis to provide a 3D image. A fourth embodiment solves this problem.

Referring to Figure 8, the longitudinal axes L of thick and thin lower electrodes 11a, 11b are skewed by a small angle ( $\theta$ ) relative to the vertical axis V of the LCD's pixel array. Since the thin electrodes 11b extend under a plurality of columns of pixels 15, perceptible vertical dark bands are avoided when the display is operating in 3D mode.

In a fifth embodiment, the light source 6 comprises narrow light sources only.

Referring to Figure 9, the lower electrode layer 11 comprises an array of parallel narrow electrodes. When the display device 3 is operating in 2D mode, all of the electrodes are energised to produce a broad, homogenous backlight.

When the display device 3 is operated in 3D mode on a first occasion, a control circuit 16 energises a first set of electrodes 11b<sub>1..6</sub>. Subsequently, when the display device 3 is operated in 3D mode on a second occasion, the control circuit 16 energises a second set of electrodes 11b'<sub>1..6</sub> (Figure 10). In the present example, where each narrow light source illuminates a five-pixel wide portion of the LCD 5, five sets of electrodes are cyclically energised for successive 3D mode operations. The advantage of this mode of operation is that the lifetime of the display is extended since the burden of forming the narrow light sources is spread across the full extent of the polymer layers 12.

It will be appreciated that there are many further embodiments of the present invention. For instance, the separate regions in the third embodiment

could contain polymer layers adapted for emitting variously red, green and blue light. Also, the skewed electrode orientation of the fourth embodiment could be applied to the second, third and fifth embodiments. The ratio of the widths of the thin and thick strips of the light source can differ from the examples given above. The ratios between these widths and the pixel pitch of the overlying modulator array can also differ from the examples given above.

**CLAIMS**

1. A display device comprising a light source (6) and an array (5) of light intensity modulators (15) for modulating light from the light source (6), wherein the light source (6) is configured for operation as a single broad light source or a plurality of narrow light sources, spaced in a spacing direction, and the light source (6) and the array (5) are arranged such that each modulator (15) is significantly illuminated by only one of said narrow sources and a string of modulators (15), parallel to said spacing direction, is illuminated by each narrow light source.

10

2. A display device according to claim 1, wherein the narrow light sources are elongate and aligned substantially perpendicular to the spacing direction.

15 3. A display device according to claim 1 or 2, wherein the light source (6) has a light emitting face which is substantially coextensive with and plane parallel to the array (5).

4. A display device according to claim 3, wherein the array (5) comprises an array of pixels (15) of a liquid crystal display (5).

20

5. A display device according to claim 3, wherein the light source (6) comprises an organic light emitting diode structure.

6. A display device according to claim 5, wherein the light source comprises alternating thick and thin parallel control electrodes (11a, 11b; 11a', 11a'', 11b', 11b'') which are themselves independently controllable.

5 7. A display device according to claim 6, wherein said electrodes (11a', 11a'', 11b', 11b'') are arranged in a two-dimensional grid having a plurality of rows and columns.

10 8. A display device according to claim 5, wherein the light source comprises thin, side-by-side, parallel, independently controllable control electrodes (11b<sub>1..6</sub>, 11b'<sub>1..6</sub>).

15 9. A display device according to claim 6, 7 or 8, wherein the pixels (15) of the liquid crystal display (5) are arranged in rows and columns and the control electrodes (11a, 11b) are skewed relative to said pixel columns.

20 10. A display device according to any preceding claim, wherein the light source (6) comprises a two-dimensional array of independently controllable light emitting regions (12R, 12G, 12B) and a control circuit (16) configured for controlling said regions (12R, 12G, 12B) in dependence on data representing an image to be displayed.

11. A display device according to claim 10, wherein said regions (12R, 12G, 12B) emit different coloured light.

12. A display device according to claim 11, wherein said regions form a repeating pattern of red, green and blue emitters (12R, 12G, 12B).

13. A display device according to claim 10, 11 or 12, wherein the  
5 control circuit (16) is configured for controlling the intensity of the light emitted by said regions (12R, 12G, 12B) in dependence on data representing the local brightness of the image to be displayed.

14. A display device according to any preceding claim, wherein the  
10 length of each of said strings is substantially the same as the spacing between its illuminating narrow source and a neighbouring narrow source thereof.

15. A display device according to claim 8, including a control circuit (16), wherein the control circuit is configured for energising a first set (11b<sub>1..6</sub>) of said control electrodes (11b<sub>1..6</sub>, 11b'<sub>1..6</sub>) to produce a 3D image and subsequently energising a second set (11b'<sub>1..6</sub>) of said control electrodes (11b<sub>1..6</sub>, 11b'<sub>1..6</sub>) to produce 3D image.

16. A electronic apparatus including a display device according to  
20 any preceding claim.

**Abstract****SWITCHABLE 2D/3D DISPLAY**

A display device comprises a backlight (6) and a light modulating layer (5) such as an LCD device. The backlight (6) can be controlled to operate as a  
5 single homogenous light source for producing 2D images or a series of narrow parallel light sources for producing 3D images. Preferably, the backlight (6) is an OLED device and the 2D/3D mode switching is achieved by selectively energising all or a subset of parallel control electrodes (11) of the OLED device.

10

(Figure 2)

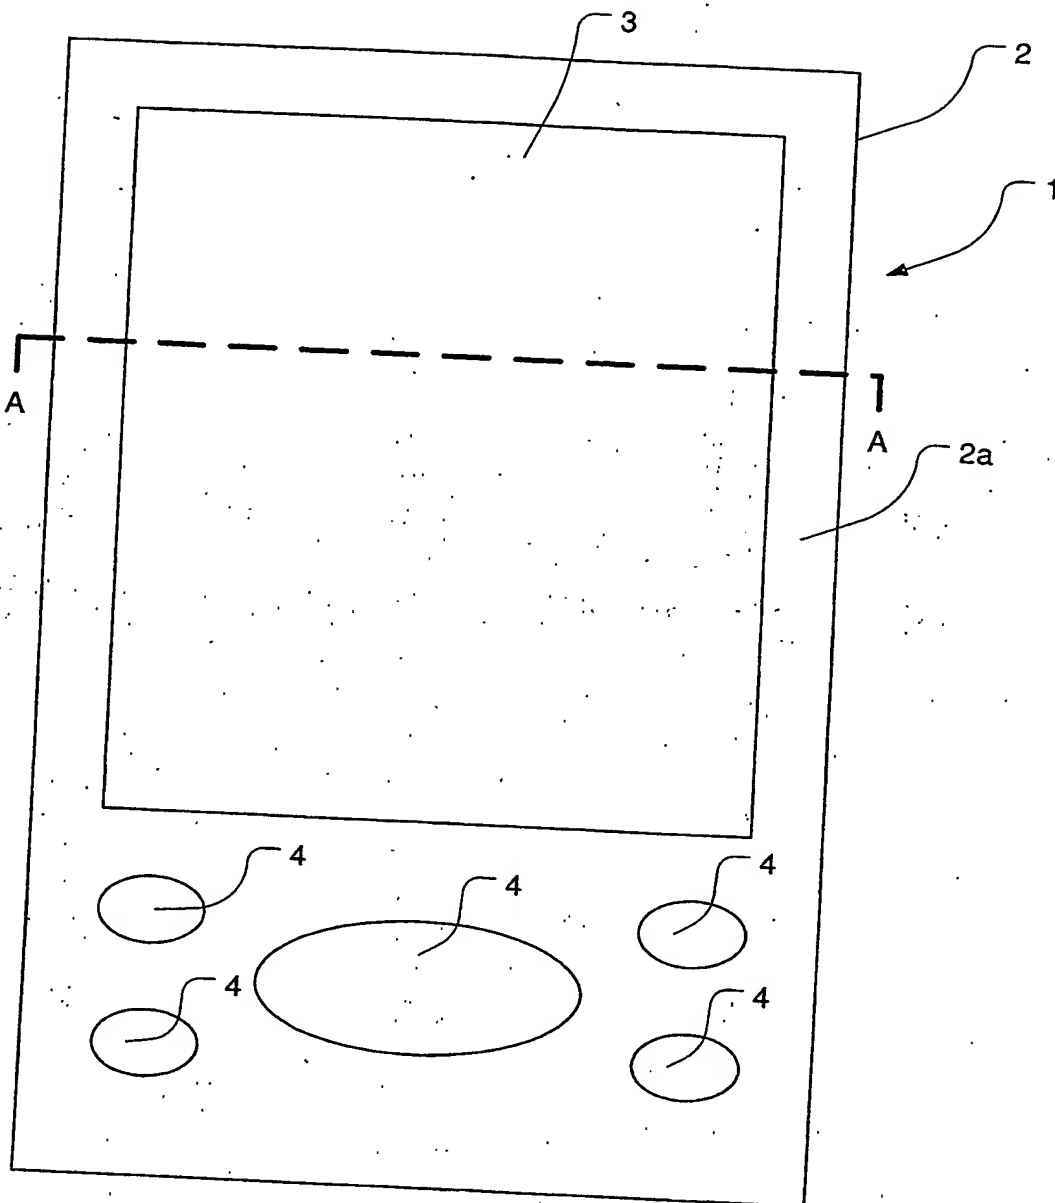


Figure 1



2/6

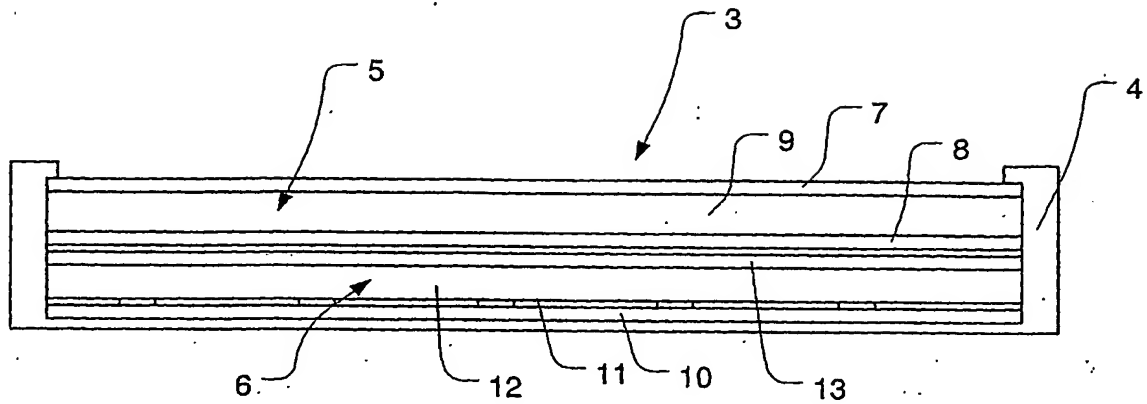


Figure 2

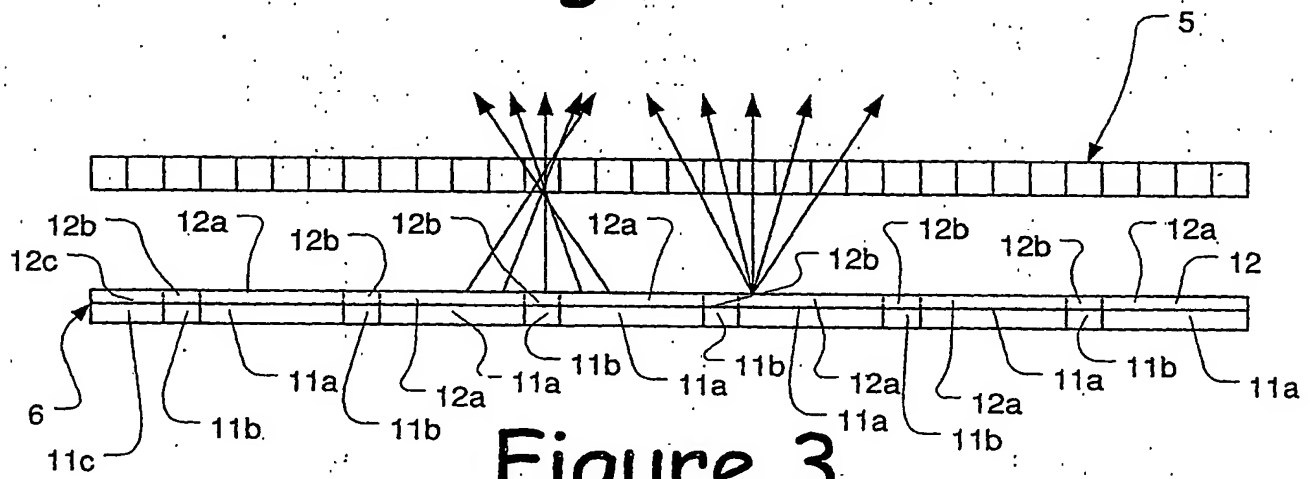


Figure 3

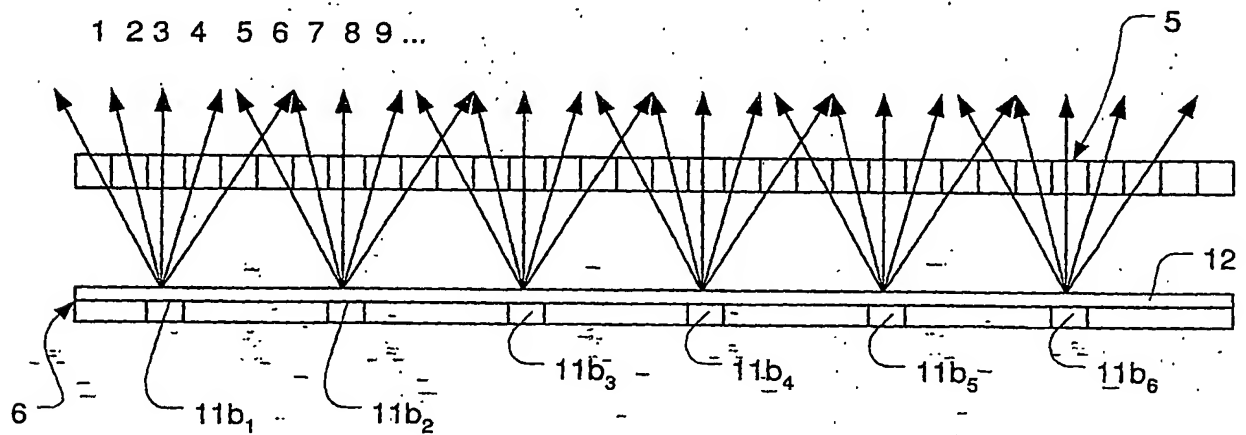


Figure 4



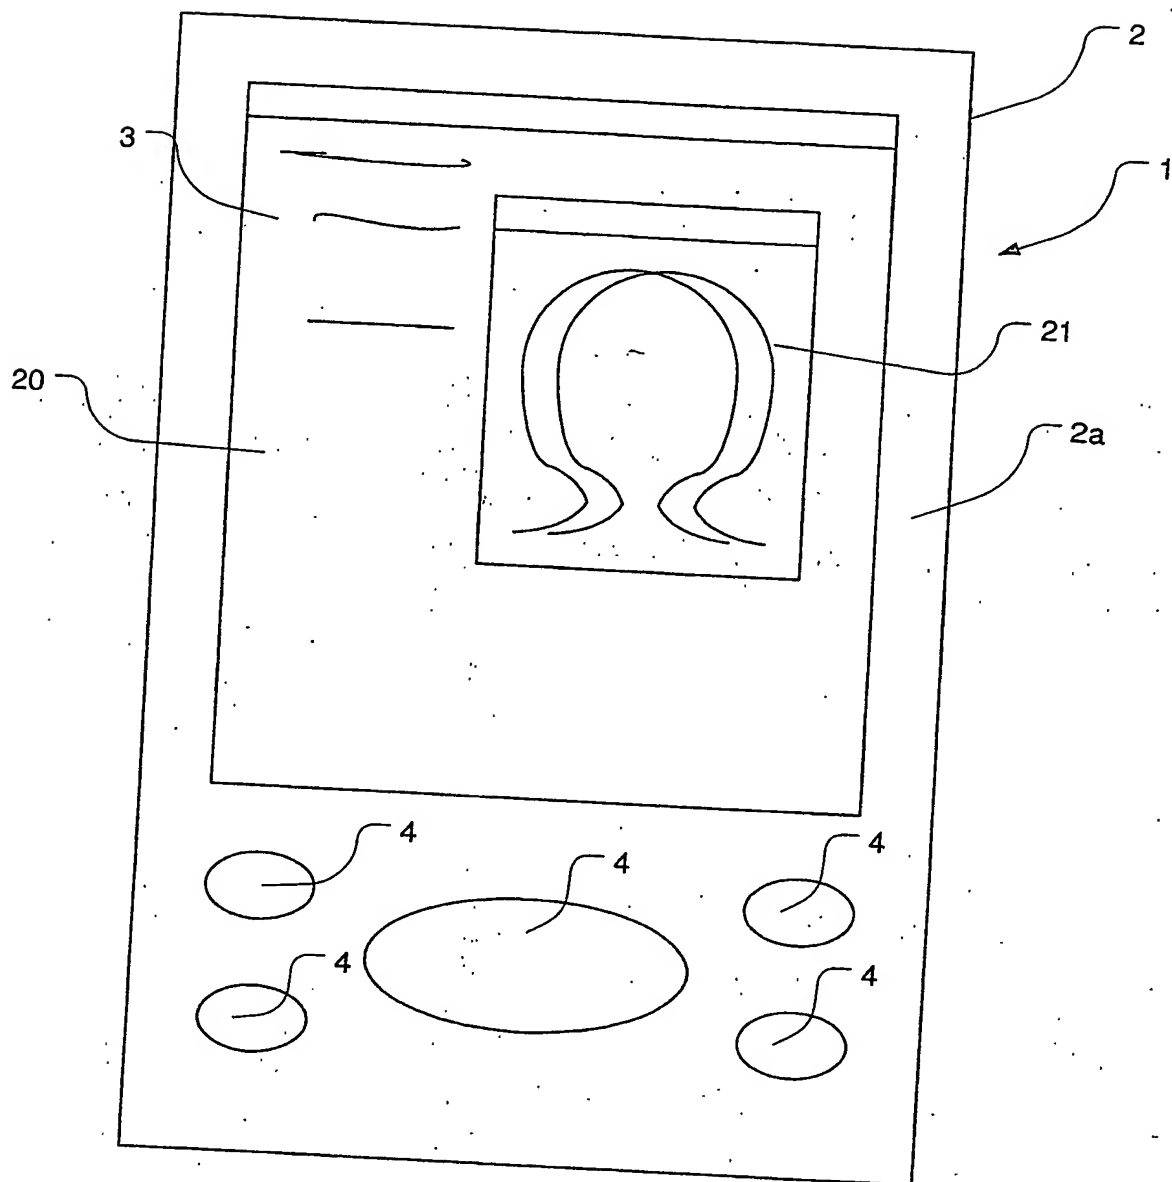
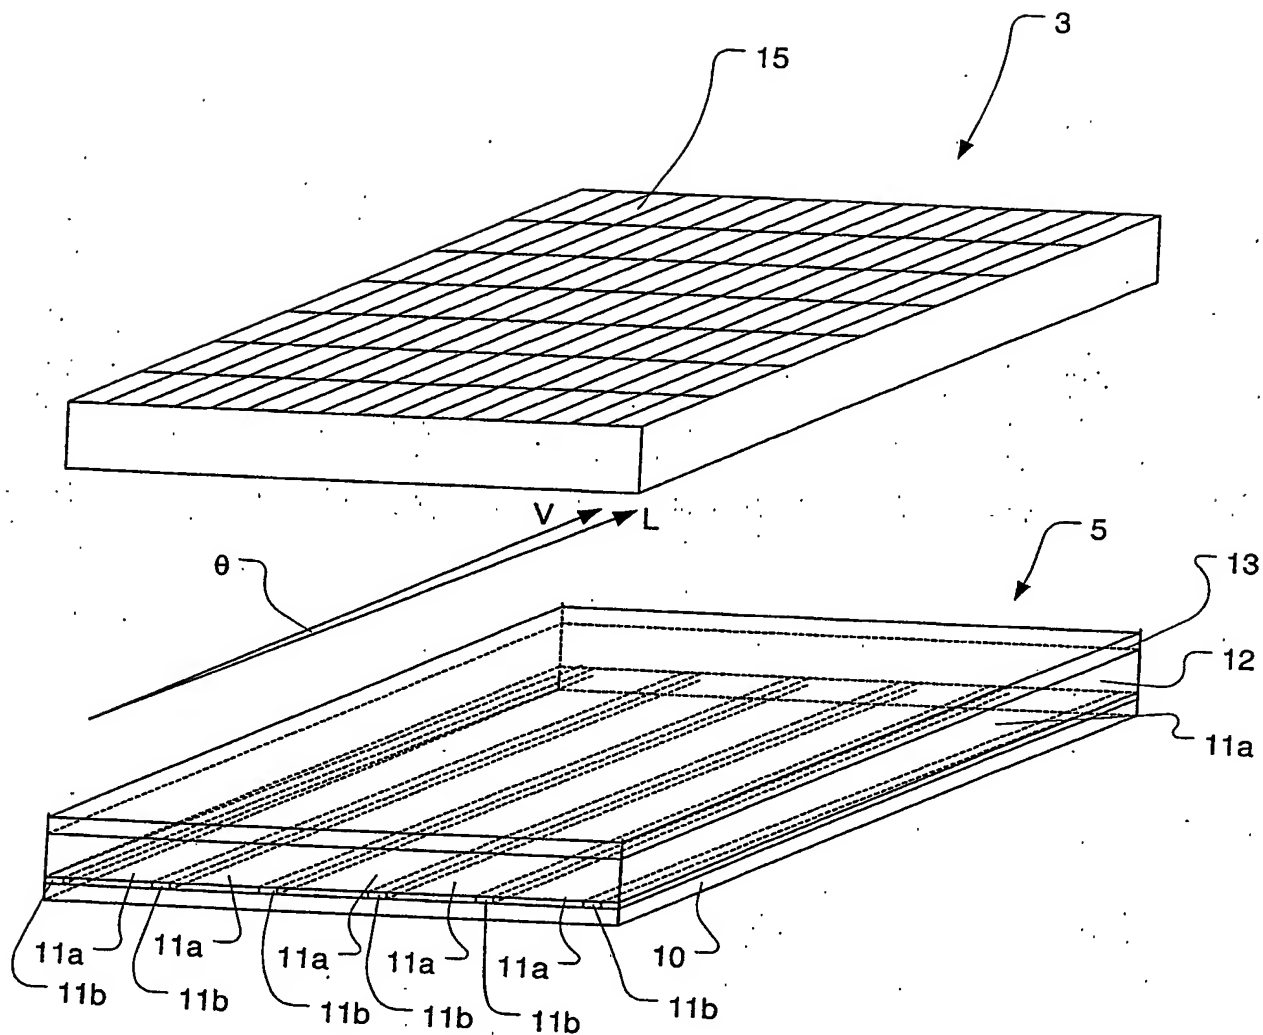


Figure 7



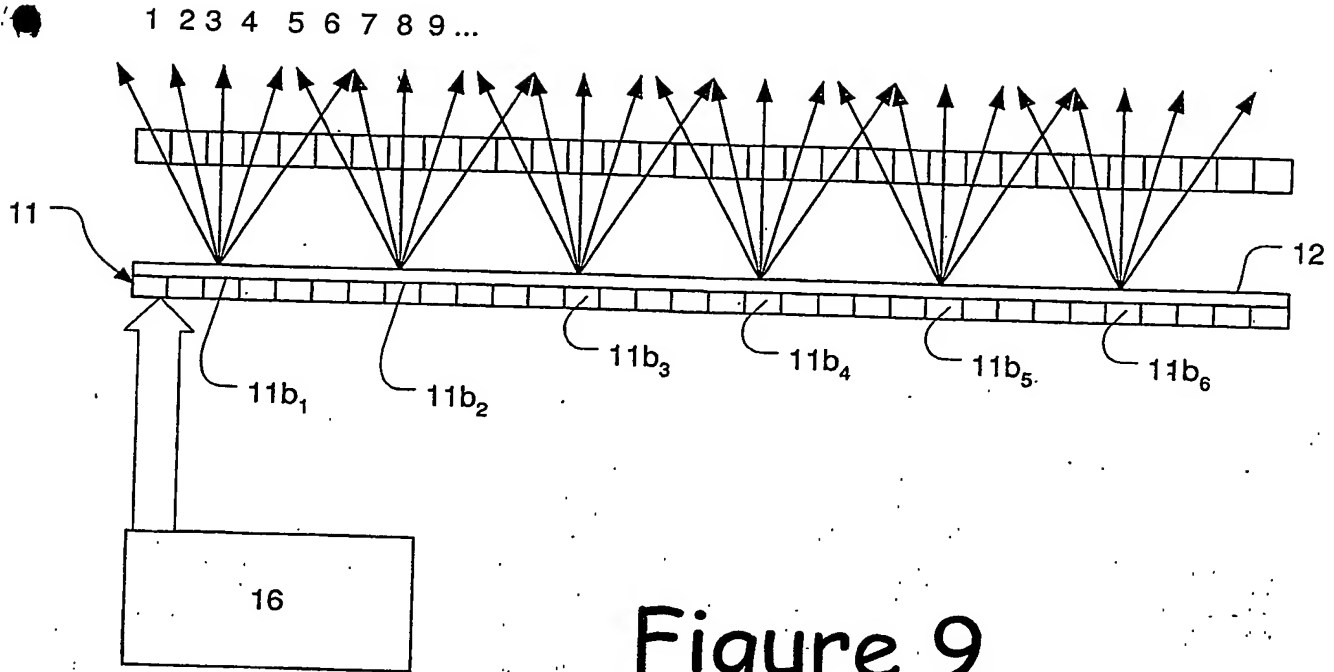


Figure 9

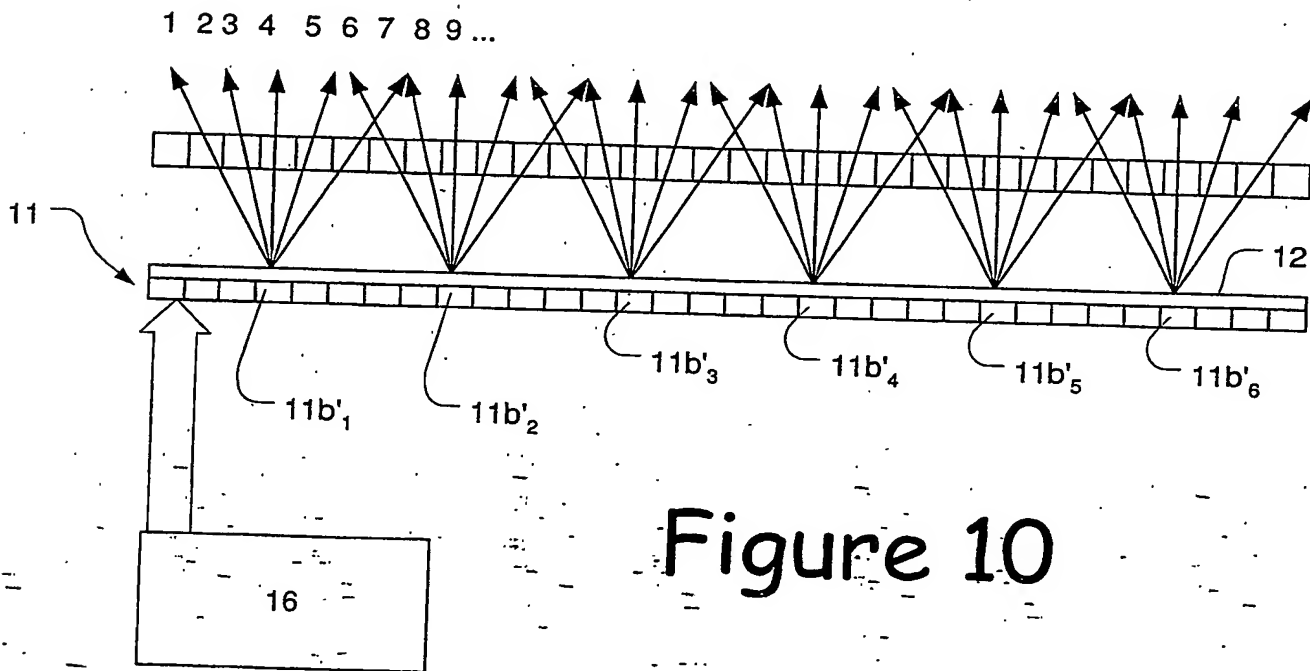


Figure 10